SUREFIRE®

We Put the Power of Light in Your Hand

Model 617GK
Benelli
Tactical Light

Users Manual

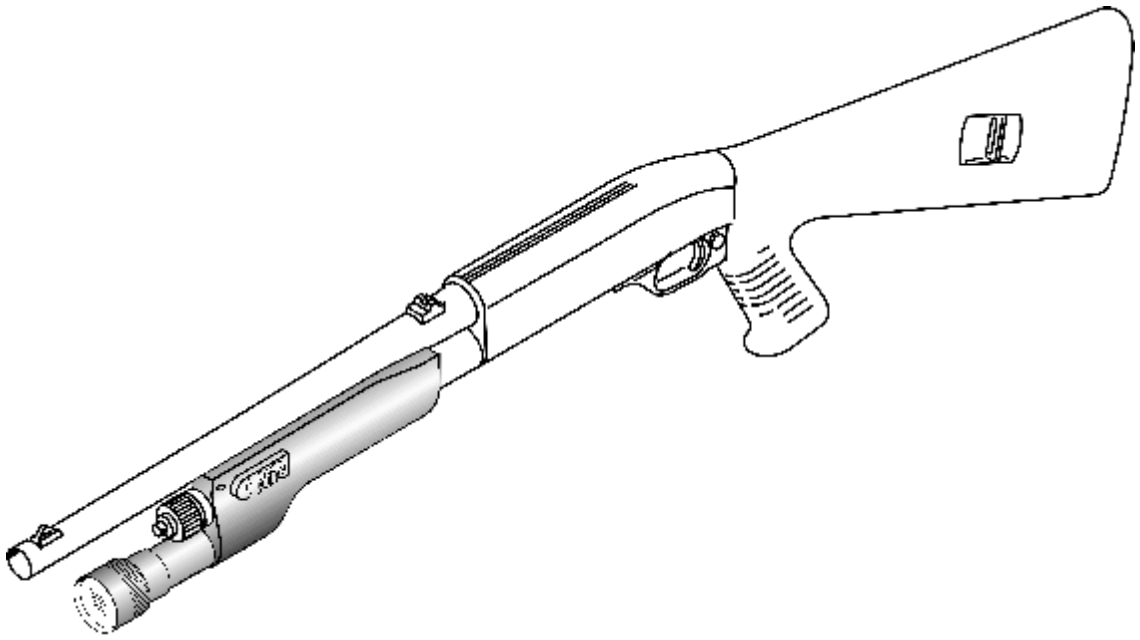

Benelli Shotgun

M1 Super 90 12 Gauge
Serial No. M104801 and later

Revision N/C 12_1_97

Model 617GK Tactical Light

Introduction

The Model 617GK Tactical Lights provide a rugged and reliable source of high intensity light that is integrated into the fore-arm of the shotgun. The lamp is shock isolated. There are two deep submersion switches built into the H17GK Housing. A two button ON/OFF switch on the left side, wired in series with the Pressure Switch located on the right side. When the ON/OFF switch is ON the Pressure Switch will turn the light ON when pressure is applied to the switch and OFF when pressure is released. When the ON/Off switch is OFF, the Pressure Switch is deactivated. A switch blocker is provided for users that want to reduce the functional size of the pressure switch.

Kit Contents

- H17Gk Housing
- L60 Lamp Module
- DL223AC Battery
- Spacer Tube
- Hex Wrench
- Model Z10 Switch Blocker
- Alcohol Wipe
- Users Manual

Installation

1. Put Safety on safe. Open action and make certain no shells remain in chamber or magazine. Close action and remove Magazine Nut and Barrel.
2. Remove fore-end from Magazine Tube and remove snap ring from front cavity of fore-end (use eye protection to prevent injury) and remove the three Washers.
3. Install these Washers into the front cavity of the H17FG Housing, two Flat Washers first then Wave Washer.
4. Take the Spacer Tube from the Kit and install it into the rear of the H17GK Housing. Install it with the open groove up and the wide end of the groove to the back, as shown in the illustration.
5. Install Housing onto Magazine Tube part way. Lay the Barrel on the Housing and slide Barrel and Housing toward the receiver until they are seated.
6. Install Magazine Nut and tighten.
7. Adjust Set Screws in H17GK Housing to limit rotation of the Housing.
8. Install Battery into Housing with the + terminal facing out.
9. Install Lamp Module into Housing.
10. Apply finger pressure to the Pressure Switch on the right side of the Housing. The light should come on. Installation is now complete.
11. Test fire the weapon to insure that the boresight has not changed. A shift in pointing may occur after installing the Tactical Light on the weapon.

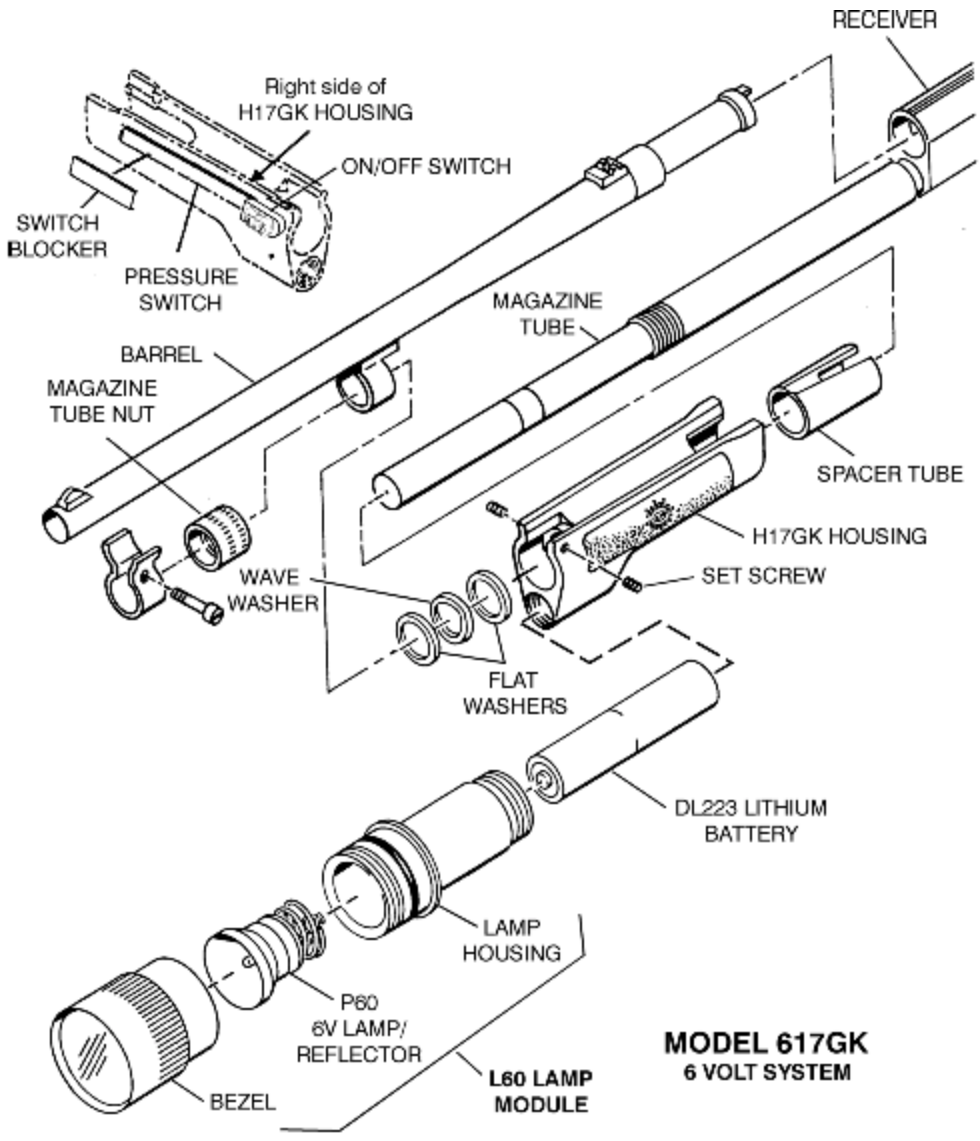
RECEIVER
Right side of
H17GK HOUSING
ON/OFF SWITCH
SWITCH
BLOCKER
PRESSURE
SWITCH
MAGAZINE
TUBE
BARREL
MAGAZINE
TUBE NUT
SPACER TUBE
H17GK HOUSING
WAVE
WASHER
SET SCREW
FLAT
WASHERS
DL223 LITHIUM
BATTERY
LAMP
HOUSING
P60
6V LAMP/
REFLECTOR
BEZEL
L60 LAMP
MODULE
MODEL 617GK
6 VOLT SYSTEM

Model 617GK Tactical Light

Switch Blocker Installation

If you want to disable the part of the pressure switch where you rest your hand, (and don't want the light to come on) you can cover it with the Model Z10 Switch Blocker. First clean the portion of the Pressure Switch to be disabled using the Alcohol Wipe from the Kit. Then remove the paper backing from the underside of the Switch Blocker and press the Switch Blocker in place on the Pressure Switch.

Battery Replacement

1. Unscrew Lamp Module from Housing and shake out old battery.
2. Install new battery with the + terminal facing out.
3. Reinstall Lamp Module.

Lamp Replacement

1. Unscrew Bezel from Lamp Module. Lift Lamp assembly out of Bezel.
2. Install replacement Lamp Assembly in Bezel and reassemble by screwing onto Lamp Housing until it is fully seated

WARNING

Lithium batteries can explode or cause burns if disassembled, shorted, recharged or exposed to fire or high temperatures. Please handle with care.

Caution

The battery used in the light is very powerful. Be sure that the switch is not touching anything when the light is stored. If the lamp is turned on while in a case or other container, the lamp can overheat and damage the light or surrounding materials. Remove the battery or unscrew the bezel far enough to prevent the lamp from turning on when stored.

If it is necessary to dispose of any batteries, do not do so by fire, mutilation or by disassembly, as this may cause toxic chemicals to be released.

Repairs & Replacements

To obtain repair or replacement call Customer Service at 800-828-8809 (toll free) or 714-545-9444 and obtain a Return Authorization number (RA). Then pack the unit carefully and return (no COD's please) to:

SureFire LLC
Repairs Department, RA# ___
18300 Mt. Baldy Circle
Fountain Valley, CA 92708

Surefire will pay any reasonable shipping costs to return the unit to you.

Warranty

SureFire LLC warrants that its products will be free from defects in materials and workmanship. SureFire LLC will repair or replace (at its option), without charge, any product or part which is found to be defective under normal use and service. Such repair or replacement shall be the purchaser's sole and exclusive remedy under this warranty. This warranty does not include normal maintenance and services and does not apply to any products or parts which have been subject to modification, misuse, negligence, accident, improper maintenance or repair by anyone other than SureFire.

"Fine Print" Warranty Limitation

There is no other express warranty. SureFire LLC hereby disclaims any and all implied warranties, including, but not limited to fitness for a particular purpose. SureFire LLC shall not be liable for incidental, consequential, or special damages arising out of, or in connection with product use or performance.

Um_H17Gk_7.C01